




### Features

- Mobile Intel® Alder Lake U Core i CPU
- The newest regulation EN 60601-1: 2006/A2:2021; IEC 60601-1:2005, IEC 60601-1:2005/AMD1:2012, IEC 60601-1:2005/AMD2:2020
- 23.8" FHD MVA Diagnostic Panel w/ P-Cap Multi-Touch
- Optional Hot-Swappable Batteries X3; IP54 rear cover batteries x 1
- Optional IP54 Rear w/Full Sealed Upside Housing Sku
- Fanless Design w/ Reliable Thermal Solution
- Dual Storage w/ M.2 SSD & 2.5" Drive (w/doggy door)
- Hospital White Plastic Housing w/ Anti-bacteria Treatment
- 4KV Isolated I/O kit, More Options for Diversified Applications
- Support PCIe4 Expansion Slot



### Specification

Model	WMP-24P IP0A (STD)	WMP-24P IP0P (IP54)	WMP-24P IP0B (ISO)
<b>CPU / Chipset</b>	FCBGA1744 Intel® 12th Gen. Core i7/i5/i3 & Celeron Processor (15W Max.) / SoC Support Vpro by Core i7/i5 CPU		
<b>Graphic</b>	Intel® Iris Xe Graphics (i7/i5 CPU) / Intel® UHD Graphics (i3 CPU)		
<b>RAM</b>	Two 4800 MHz DDR5 SODIMM Socket Support Dual Channel, non-ECC, up to 64GB		
<b>OS Support</b>	Optional Win 10 IoT Enterprise LTSC, Win 11 IoT Enterprise GAC		
<b>Storage</b>	1 x M.2 (M Key 2280) with PCIe4 for SSD, Standard rear cover:2.5" SATA3 HDD/SSD drive bay x 1 with doggy door, IP54 rear cover:2.5" SATA3 HDD/SSD drive bay x 1		
<b>Expansion</b>	1 x PCIe4 (25W max.), 1 x M.2 E Key		
<b>Display Size</b>	23.8" wide TFT-Color LCD (16:9)		
<b>Display</b>	1920 x 1080 (Full HD), 16.7M colors (True.8 bit), 178(H) / 178(V), 250 nits (Typ. Center point), CR:3000: 1 (Typ)		
<b>Touch Screen</b>	Projected Capacitive Multi-Touch Panel / Light Transmission: ≥85% / Hardness: ≥7H pencil, pressure 765g/45° / Life: 50000		
<b>USB</b>	4 x USB3.2 gen II	4 x USB3.2 gen II, 1 x ISO USB2.0	
<b>COM</b>	1 x RS232/RS422/RS485 1 x RS-232,	1 x ISO RS232/RS422/RS485 1 x ISO RS-232	
<b>LAN</b>	2 x RJ45 (1 x 1.0 Gbps, 1 x 2.5 Gbps)		2 x RJ45 (1 x 1.0 Gbps, 1 x 2.5 Gbps), 1 x ISO RJ45
<b>Audio/ Video</b>	1 x Line-out & 1 x Microphone-in (3.5mm phone jack) / 1 x DP1.4a, 1 x HDMI2.0, 1 x HDMI (video-in)		
<b>Speakers &amp; Mic.</b>	2 x 2-watt Speakers & Integrated Microphone (at Housing Bottom Side)		
<b>Reading light</b>	Light bar x 2 (at housing bottom side)		
<b>Control Hot Key (R to L)</b>	Battery LED Indicator, Power On/Off, Volume +/-, Brightness +/-, Reading Light, LCD Backlight On/Off, Clean Me, Function Key		
<b>Cooling</b>	Fanless Design with External Heatsink		
<b>Battery Pack</b>	Option 3xDR-202, Hot-Swappable Battery	Option 1xDR-202 UPS Battery	Option 3xDR-202 Series, Hot-Swappable Lithium-ion Battery
<b>Power Input</b>	DC-In x 1, DC 14 ~ 24V input		
<b>Power Adapter</b>	AC input 100~240V / 47 ~ 63 Hz / DC output 24V, 180W		
<b>Temperature</b>	Operating Temperature: 0~40°C (Burn-in, not airtight, W/ Battery 0~35°C) / Storage Temperature: -20~60°C		
<b>Humidity</b>	Operating & Storage:10 ~ 90%, non-condensing		
<b>IP Rating</b>	Front IP65, Rear IPx1	Front IP65, Rear IP54	Front IP65, Rear IPX1
<b>Housing</b>	Front: Full flat design/ Touch (standard)/ Glass (customized); Rear: Plastic White w/Anti-bacteria (MRSA) Housing		
<b>Dimensions (Net)</b>	594.0mm (H) x 397.0mm (V) x 56.0mm (T)		
<b>Weights (Net)</b>	9.0 kg (w/o power adapter/battery pack), 10.5 kg (with x3 battery pack & no power adaptor)		
<b>Mounting</b>	VESA 100 x 100		
<b>Certification</b>	CE: EN IEC 60601-1-2:2015/A1:2021(Ed 4.1) EN 60601-1: 2006/A2:2021; IEC 60601-1:2005, IEC 60601-1:2005/AMD1:2012, IEC 60601-1:2005/AMD2:2020 VCCI: 2016-11, Class B (PSU/Battery with PSE) / FCC: Part 18 Class B UL: AAMI ES60601-1:2005/(R)2012 and A1:2012/(R)2012 and A2:2021 By Project cUL: CAN/CSA-C22.2 No. 60601-1:14 By Project ISO 14971 / IEC62133		

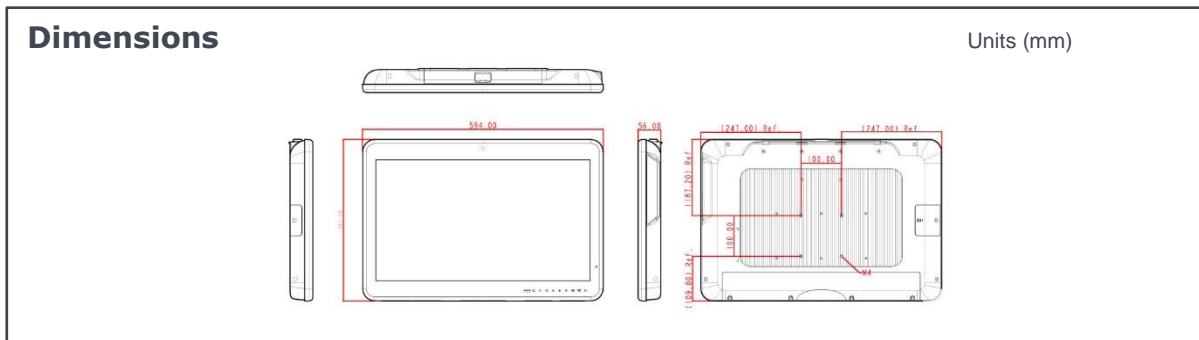


### Major Options & Customization

Battery & Charger	<ul style="list-style-type: none"> <li>① Battery Pack: 3xDR-202 Series, Hot-Swappable Battery or 1xDR-202 UPS Battery for IP54 Sku</li> <li>② Battery Charger Station: JW202W2 3-Slot w/200W Power Adaptor</li> </ul>
Add On Parts	<ul style="list-style-type: none"> <li>① 802.11 ac/a/b/g/n WLAN + Bluetooth module</li> <li>② 802.11 ax/a/b/g/n WLAN + Bluetooth module (Wifi-6)</li> <li>③ Auto focus 5M pixel webcam module</li> <li>④ 2.5" storage</li> <li>⑤ M.2 type 2280 module</li> <li>⑥ RFID (13.56MHz); RFID with single sign on</li> <li>⑦ TPM 2.0 module (SPI)</li> <li>⑧ Full HD capture card or 4K SC710N1 12G SDI capture card</li> <li>⑨ USB 2.0 x 2 at side (different rear housing)</li> <li>⑩ Smart card reader at side or CAC / PIV Reader (FIPS-201) (different rear housing)</li> <li>⑪ 5V1A power Jack (for Standard Type)</li> <li>⑫ Equipotential terminal pin</li> <li>⑬ AG film (Can't exist with DICOM)</li> <li>⑭ Light sensor for LCD auto brightness, (Can't exist with webcam, DICOM)</li> <li>⑮ DICOM part 14 compliance (optional order configuration)</li> <li>⑯ Isolated 4KV module (optional order configuration)</li> <li>⑰ 30 Watt Power output card for external device.</li> <li>⑱ USB 5/6 (USB 2.0 can't co-exist with side USB)</li> <li>⑲ Integrated hot-swappable batteries (DR-202 series)</li> <li>⑳ IP54 Rear Cover (optional order configuration)</li> </ul>
Customization	<ul style="list-style-type: none"> <li>① Tempered Glass</li> <li>② COM Port Support 5V1A Output</li> <li>③ AG Coating</li> </ul>

### Order Information

Item	Configuration
WMP-24P-IP0A-i5	Core i5-1235U 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro
WMP-24P-IP0A-i7	Core i7-1255U 4.70GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro
WMP-24P-IP0A-i5UE	Core i7-1245UE 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro
WMP-24P-IP0B-i5-ISO	Core i5-1235U 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro / ISO
WMP-24P-IP0P-i5-IP54	Core i5-1235U 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro / IP54

### I/O ports

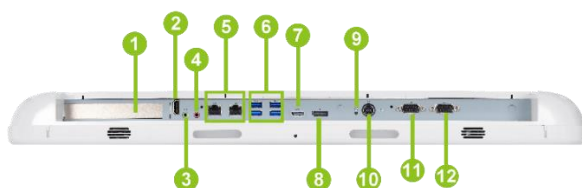

- ① PCI-E expansion
- ② Video-in
- ③ Line-out
- ④ Microphone-in
- ⑤ LAN x 2
- ⑥ USB3.2 gen II x 4
- ⑦ HDMI out x 1
- ⑧ DP x 1
- ⑨ Reset
- ⑩ DC-in
- ⑪ RS232/422/485
- ⑫ RS232

